






Versatile Installation

Wall mount / Embedded/VESA

Full Metal Chassis

corrosion and oxidation resistance

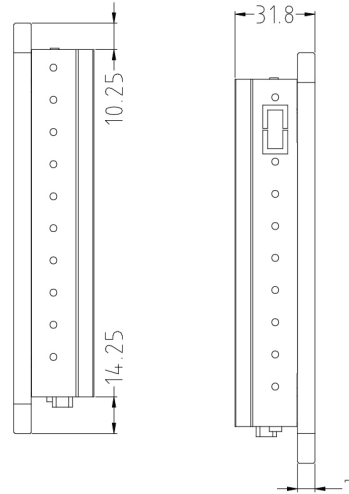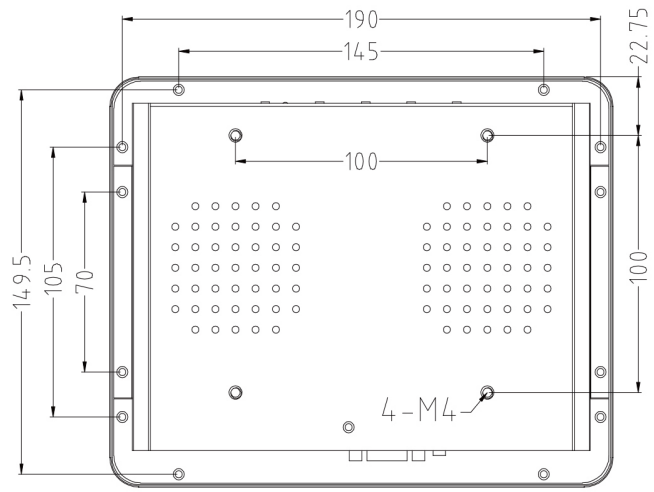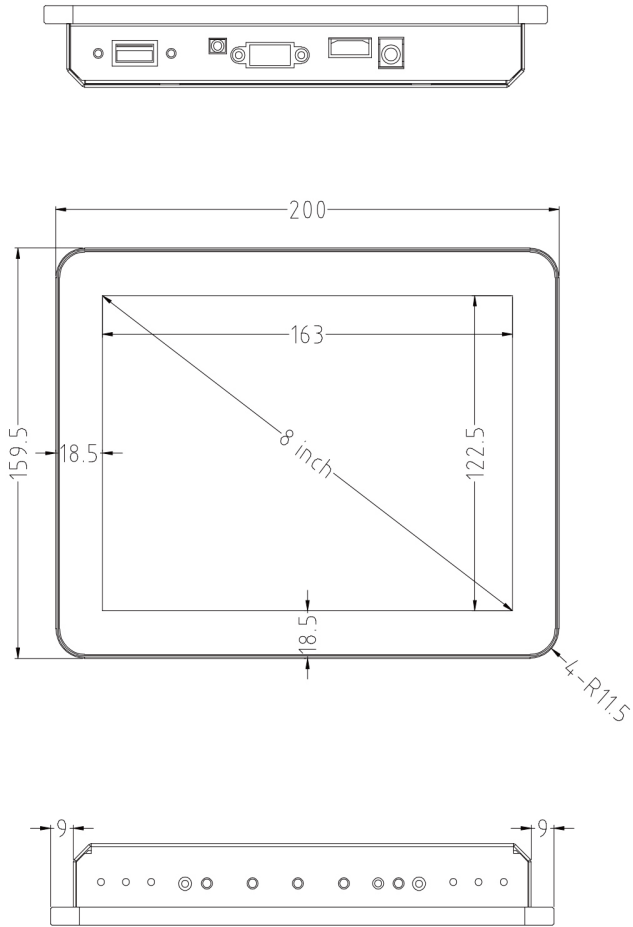

LCD Panel

| | |
|----------------------------|--------------|
| IP Rating | IP65 Front |
| Screen diagonal | 8inch |
| Display active screen size | 163*122.5mm |
| Aspect ratio | 4:3 |
| Physical resolution | 1024*768 |
| Colours displayed | 16.7M 52% |
| Brightness (cd/m2) | 250 |
| Contrast | 800:1 |
| Visual Angle H/V (°) | 175/175 |
| Backlight Lifetime (hours) | LED / 30,000 |

Touch Panel

| | |
|------------------|--|
| Touch Technology | Projected Capacitive 10-Point Multitouch |
| Touch Connector | USB |
| Surface Hardness | 7h |

External Connectors

| | | | |
|-----------|----|---------|----|
| 12v DC IN | x1 | HDMI IN | x1 |
| USB | x1 | VGA | X1 |
| Audio I/O | x1 | | |

Power

| | |
|--------------------------|--------------|
| Power Supply | 100-240V AC; |
| Working Power (V) | 12 |
| Power Consumption (W) | <20 |
| Stand-By Consumption (W) | <1 |

Operation

| | |
|----------------------------|----------------|
| Operating Temperature (°C) | 0°C-50°C |
| Humidity Range (RH) | 0% - 90% |
| Net weight (kg) | 0.95kg |
| Gross weight (kg) | 1.95kg |
| Housing material | Sheet Metal |
| Housing (mm) L × W × H | 200*159.5*31.8 |
| Mounting | 100*100 |

Included in the Delivery

| | | | |
|--------------------|----|----------------------|----|
| Manual | x1 | Power Supply | x1 |
| Wall mount bracket | x1 | USB CABLE+HDMI CABLE | X1 |

Installation

